


	Cummins Inc. Columbus, Indiana 47202-3005		Basic Engine Model: QSB7-G4 NR3	Curve Number: FR-92277	<i>G-DRIVE</i> QSB 1
	Engine Data Sheet		Engine Critical Parts List: CPL: 42605	Date: 10Dec07	
Displacement : 6.69 litre (408 in ³)			Bore : 107 mm (4.21 in.) Stroke : 124 mm (4.88 in.)		
No. of Cylinders : 6			Aspiration : Turbocharged and Air to Air Aftercooled		

Engine Speed	Standby Power		Prime Power		Continuous Power	
	kWm	hp	kWm	hp	kWm	hp
1500	196	263	168	225	152	204
1800	214	287	184	246	164	220


Engine Performance Data @ 1500 rpm

OUTPUT POWER			FUEL CONSUMPTION			
%	kWm	hp	kg/ kWm·h	lb/ hp·h	litre/ hour	US gal/ hour
STANDBY POWER						
100	196	263	0.206	0.339	48	12.6
PRIME POWER						
100	168	225	0.215	0.353	42	11.2
75	126	169	0.228	0.375	34	8.9
50	84	113	0.244	0.402	24	6.4
25	42	56	0.238	0.392	12	3.1
CONTINUOUS POWER						
100	152	204	0.221	0.364	40	10.5

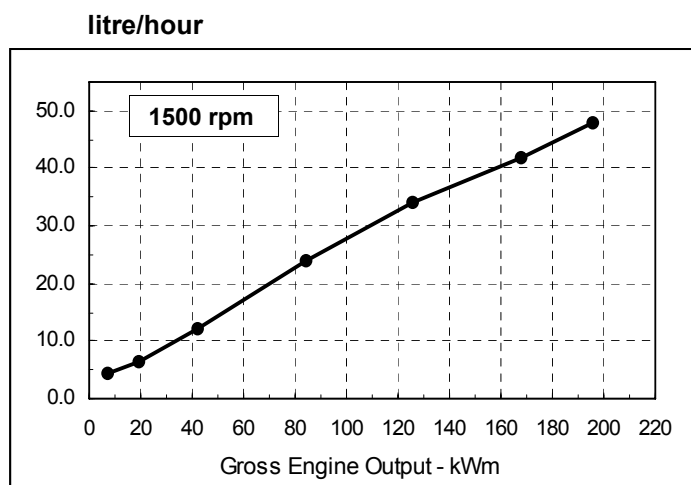

Engine Performance Data @ 1800 rpm

OUTPUT POWER			FUEL CONSUMPTION			
%	kWm	hp	kg/ kWm·h	lb/ hp·h	litre/ hour	US gal/ hour
STANDBY POWER						
100	214	287	0.206	0.339	52	13.7
PRIME POWER						
100	184	246	0.214	0.352	46	12.2
75	138	185	0.229	0.377	37	9.8
50	92	123	0.242	0.398	26	6.9
25	46	62	0.250	0.412	14	3.6
CONTINUOUS POWER						
100	164	220	0.216	0.355	42	11.0

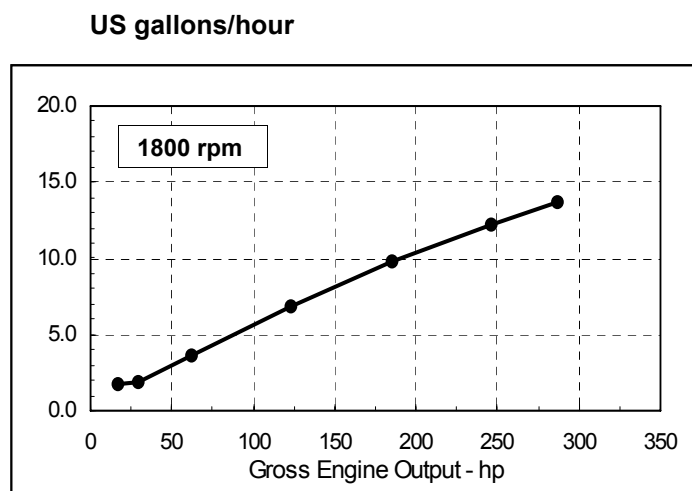

CONVERSIONS:(litres = US Gal x 3.785) (US Gal = litres x 0.2642)

Data Subject to Change Without Notice

These guidelines have been formulated to ensure proper application of generator drive engines in A.C. generator set installations. **STANDBY POWER RATING:** Applicable for supplying emergency power for the duration of the utility power outage. No overload capability is available for this rating. Under no condition is an engine allowed to operate in parallel with the public utility at the Standby Power rating. This rating should be applied where reliable utility power is available. A Standby rated engine should be sized for a maximum of an 80% average load factor and 200 hours of operation per year. This includes less than 25 hours per year at the Standby Power rating. Standby ratings should never be applied except in true emergency power outages. Negotiated power outages contracted with a utility company are not considered an emergency. **PRIME POWER RATING:** Applicable for supplying electric power in lieu of commercially purchased power. Prime Power applications must be in the form of one of the following two categories: **UNLIMITED TIME RUNNING PRIME POWER:** Prime Power is available for an unlimited number of hours per year in a variable load application. Variable load should not exceed a 70% average of the Prime Power rating during any operating period of 250 hours. The total operating time at 100% Prime Power shall not exceed 500 hours per year. A 10% overload capability is available for a period of 1 hour within a 12-hour period of operation. Total operating time at the 10% overload power shall not exceed 25 hours per year. **LIMITED TIME RUNNING PRIME POWER:** Limited Time Prime Power is available for a limited number of hours in a non-variable load application. It is intended for use in situations where power outages are contracted, such as in utility power curtailment. Engines may be operated in parallel to the public utility up to 750 hours per year at power levels never to exceed the Prime Power rating. The customer should be aware, however, that the life of any engine will be reduced by this constant high load operation. Any operation exceeding 750 hours per year at the Prime Power rating should use the Continuous Power rating. **CONTINUOUS POWER RATING:** Applicable for supplying utility power at a constant 100% load for an unlimited number of hours per year. No overload capability is available for this rating.

Reference AEB 10.47 for determining Electrical Output.

Data shown above represent gross engine performance capabilities obtained and corrected in accordance with ISO-3046 conditions of 100 kPa (29.53 in Hg) barometric pressure [110 m (361 ft) altitude], 25 °C (77 °F) air inlet temperature, and relative humidity of 30% with No. 2 diesel or a fuel corresponding to ASTM D2. Derates shown are based on 15 in H₂O air intake restriction and 2 in Hg exhaust back pressure.

The fuel consumption data is based on No. 2 diesel fuel weight at 0.85 kg/litre (7.1 lbs/US gal). Power output curves are based on the engine operating with fuel system, water pump and lubricating oil pump; not included are battery charging alternator, fan, optional equipment and driven components.

Data Status: --Limited-Production--

Data Tolerance: ± 5%

Chief Engineer:





1500 rpm Derate Curves

1800 rpm Derate Curves



Ambient Temp. °C/°F

Ambient Temp. °C/°F

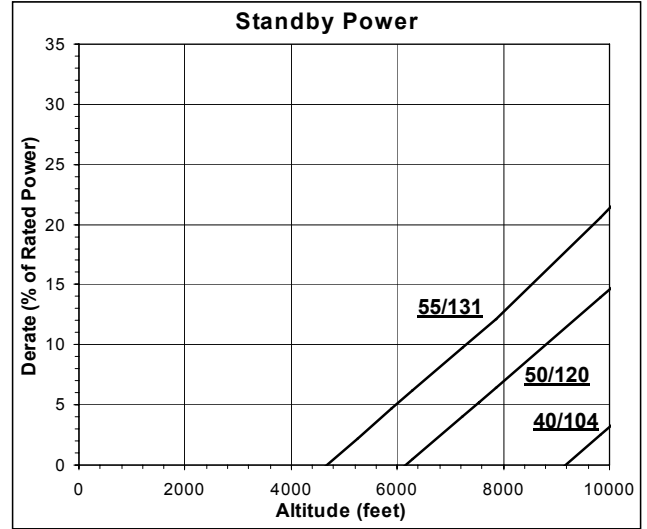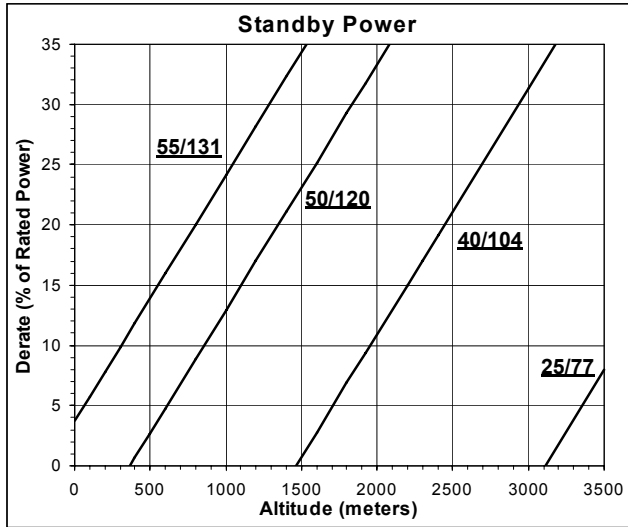



Ambient Temp. °C/°F

Ambient Temp. °C/°F

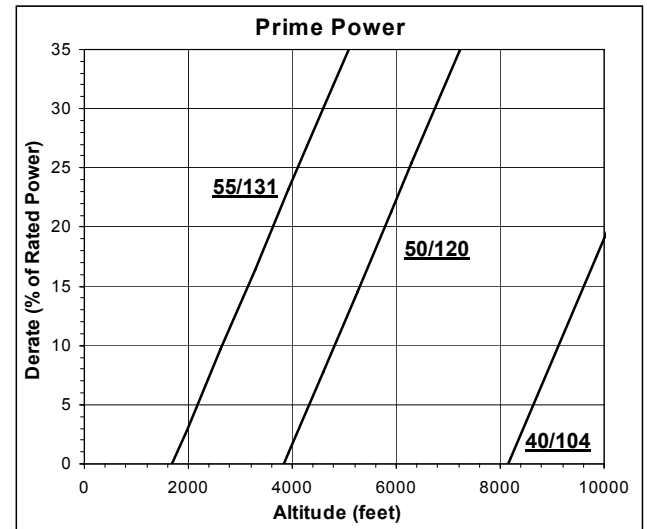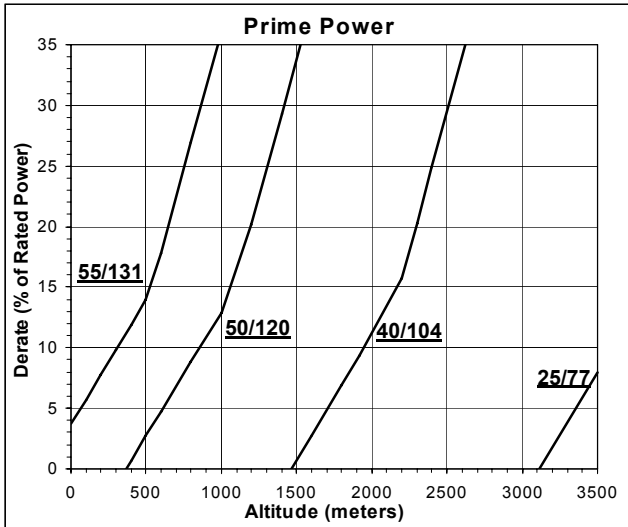

Ambient Temp. °C/°F

Ambient Temp. °C/°F

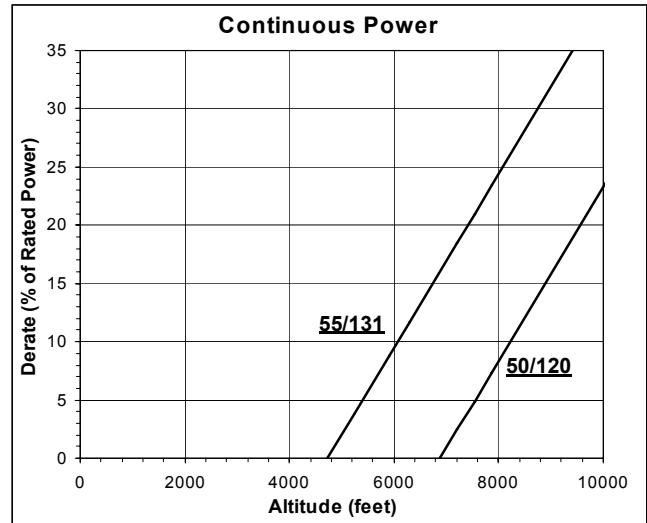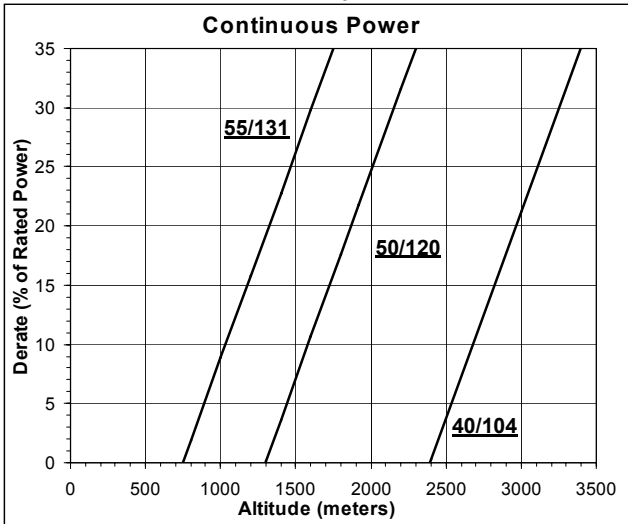

Operation At Elevated Temperature And Altitude:

For **Standby Operation** above these conditions, derate by an additional 6% per 300 m (1000 ft), and 22% per 10° C (18° F).

For **Prime Operation** above these conditions, derate by an additional 14% per 300 m (1000 ft), and 50% per 10° C (18° F).

For **Continuous Operation** above these conditions, derate by an additional 11% per 300 m (1000 ft), and 38% per 10° C (18° F).

Operation At Elevated Temperature And Altitude:

For **Standby Operation** above these conditions, derate by an additional 5% per 300 m (1000 ft), and 16% per 10° C (18° F).

For **Prime Operation** above these conditions, derate by an additional 10% per 300 m (1000 ft), and 45% per 10° C (18° F).

For **Continuous Operation** above these conditions, derate by an additional 7% per 300 m (1000 ft), and 32% per 10° C (18° F).

Cummins Inc.

Engine Data Sheet

ENGINE MODEL : **QSB7-G4 NR3** CONFIGURATION NUMBER : D313007GX03

DATA SHEET : DS-92277

DATE : 10Dec07

PERFORMANCE CURVE : FR-92277

INSTALLATION DIAGRAM

• Fan to Flywheel:

CPL NUMBER

• Engine Critical Parts List: 42605

GENERAL ENGINE DATA

Type	4-Cycle; In-line; 6-Cylinder Diesel
Aspiration	Turbocharged and Charge Air Cooled
Bore x Stroke	4.21 x 4.88 (107 x 124)
Displacement	408 (6.69)
Compression Ratio	17.2 : 1
Dry Weight (Approximate), Fan to Flywheel Engine	1047 (475)
Wet Weight (Approximate), Fan to Flywheel Engine	1069 (485)
Moment of Inertia of Rotating Components	
• with FW 9857 Flywheel	24.7 (1.55)
• with FW 9878 Flywheel	36.8 (2.47)
Center of Gravity from Rear Face of Block	13.7 (348)
Center of Gravity Above Crankshaft Centerline	5.91 (150)
Maximum Static Loading at Rear Main Bearing	N/A (N/A)

ENGINE MOUNTING

Maximum Bending Moment at Rear Face of Block	1000 (1356)
--	-------------

EXHAUST SYSTEM

Maximum Back Pressure	3 (10.2)
-----------------------------	----------

AIR INDUCTION SYSTEM

Maximum Intake Air Restriction	
• with Dirty Filter Element	25 (6.2)
• with Clean Filter Element	15 (3.7)

COOLING SYSTEM**Jacket Water Circuit Requirements**

Coolant Capacity — Engine Only	2.7 (10.2)
Maximum Static Head of Coolant Above Engine Crank Centerline	60 (18.3)
Standard Thermostat (Modulating) Range	175-203 (79-95)
Minimum Pressure Cap	15 (103)
Maximum Top Tank Temperature for Standby / Prime Power	233/225 (112/107)
Maximum Coolant Friction Head External to Engine	5 (35)

Charge Air Cooler Requirements

Maximum Temp. Rise Between Engine Air Intake and Intake Manifold - 1500/1800 rpm	45 (25)
Maximum Air Pressure Drop from Turbo Air outlet to Intake Manifold - 1500/1800 rpm	2.5/4 (8.5/13.5)
Maximum Intake Manifold Temperature @ 77 °F (25 °C) ambient - 1500/1800 rpm	122 (50)
Maximum Intake Manifold Temperature for engine protection (Shut Down Threshold)	203 (95)

LUBRICATION SYSTEM

Oil Pressure @ Idle Speed	10 (69)
@ Governed Speed	40-60 (276-414)
Maximum Oil Temperature	280 (138)
Oil Capacity with OP 9457 Oil Pan : Low - High	4.0-4.6 (15.1-17.4)
Total System Capacity (Including Filter)	5.0 (18.9)

FUEL SYSTEM

Type Injection System	Bosch HPCR	
Maximum Restriction at Lift Pump(clean/dirty filter)..... — in Hg (kPa)	5/10	(17/34)
Maximum Allowable Head on Injector Return Line (Consisting of Friction Head and Static Head) — in Hg (kPa)	6	(20)
Maximum Fuel Flow to Injector Pump — US gph (litre/hr)	28	(106)
Maximum Return Fuel Flow — US gph (litre/hr)	27	(103)
Maximum Fuel Inlet Temperature — °F (°C)	160	(71)

ELECTRICAL SYSTEM

Cranking Motor (Heavy Duty, Positive Engagement)	— volt	12	24
Battery Charging System, Negative Ground	— ampere	100	70
Maximum Allowable Resistance of Cranking Circuit	— ohm	0.001	0.002
Minimum Recommended Battery Capacity			
• Cold Soak @ 0 °F to 32 °F (-18 °C to 0 °C)	— 0°F CCA	1100	(550)

COLD START CAPABILITY

Minimum Ambient Temperature for NFPA 110 Cold Start (90 degree F Coolant Temperature)	— °F (°C)	40	(4)
Minimum Ambient Temperature for Unaided Cold Start	— °F (°C)	10	(-12)

PERFORMANCE DATA

- All data is based on:
- Engine operating with fuel system, water pump, lubricating oil pump, air cleaner and exhaust silencer; not included are battery charging alternator, fan, and optional driven components.
 - Engine operating with fuel corresponding to grade No. 2-D per ASTM D975.
 - ISO 3046, Part 1, Standard Reference Conditions of:

Barometric Pressure : 100 kPa (29.53 in Hg)	Air Temperature : 25 °C (77 °F)
Altitude : 110 m (361 ft)	Relative Humidity : 30%

Steady State Stability Band at Any Constant Load — % +/- 0.25

Estimated Free Field Sound Pressure Level of a Typical Generator Set;

Excludes Exhaust Noise; at Rated Load and 7.5 m (24.6 ft); @1800 rpm..... — dBA 88

Exhaust Noise at 1 m Horizontal from Centerline of Exhaust Pipe Outlet Upwards at 45 °..... — dBA 95.2

Governed Engine Speed	rpm
Engine Idle Speed	rpm
Gross Engine Power Output	hp (kW)
Brake Mean Effective Pressure	psi (kPa)
Piston Speed	ft/min (m/s)
Friction Horsepower	hp (kW)
Engine Water Flow at Stated Friction Head External to Engine:	
• 2.5 psi Friction Head	US gpm (litre/s)
• Maximum Friction Head	US gpm (litre/s)

STANDBY POWER		PRIME POWER	
60 hz	50 hz	60 hz	50 hz
1800	1500	1800	1500
700 - 900	700 - 900	700 - 900	700 - 900
287 (214)	263 (196)	246 (184)	225 (168)
309 (2129)	340 (2342)	265 (1825)	290 (2003)
1464 (7.4)	1220 (6.2)	1464 (7.4)	1220 (6.2)
25 (19)	19 (14)	25 (19)	19 (14)
38 (2.4)	32 (2.0)	38 (2.4)	32 (2.0)
33 (2.1)	26 (1.6)	33 (2.1)	26 (1.6)
542 (256)	445 (211)	525 (248)	428 (202)
928 (498)	1023 (551)	894 (479)	995 (535)
1410 (666)	1240 (586)	1349 (637)	1185 (560)
24.4:1	21.8:1	26.5:1	23.5:1
1186 (21)	1090 (20)	1057 (19)	971 (18)
4336 (77)	4103 (73)	3819 (68)	3702 (66)
9441 (166)	8877 (156)	8727 (154)	8202 (145)
42 (1)	37 (1)	33 (1)	30 (1)
2485 (44)	1982 (35)	2333 (41)	1812 (32)
40 (18)	33 (15)	38 (18)	31 (15)
32 (223)	30 (209)	30 (210)	28 (194)
382 (195)	373 (190)	367 (187)	356 (180)

Engine Data

Intake Air Flow	cfm (litre/s)
Exhaust Gas Temperature	°F (°C)
Exhaust Gas Flow	cfm (litre/s)
Air to Fuel Ratio	air : fuel
Radiated Heat to Ambient	BTU/min (kW)
Heat Rejection to Jacket Coolant	BTU/min (kW)
Heat Rejection to Exhaust	BTU/min (kW)
Heat Rejected to Fuel	BTU/min (kW)
Heat Rejected to Aftercooler	BTU/min (kW)
Charge Air Flow	lb/min (kg/min)
Turbocharger Compressor Outlet Pressure	psi (kPa)
Turbocharger Compressor Outlet Temperature	°F (°C)

N.A. - Not Available

N/A - Not Applicable to this Engine

TBD - To Be Determined

ENGINE MODEL : QSB7-G4 NR3

DATA SHEET : DS-92277

DATE : 10Dec07

CURVE NO. : FR-92277